




DIVISION OF SKYWAY CANADA LIMITED

SKYHIGH Steel Post Shores

SUPERIOR BENEFITS

- 5 standard sizes to improve application flexibility with outstanding load capability
- Proven durable in the most demanding environments
- Self-cleaning adjustment threads ease use on the job
- Galvanized Pins and Strand wires ensure longevity and ease use
- Large, folding adjustment handles improve on-site performance

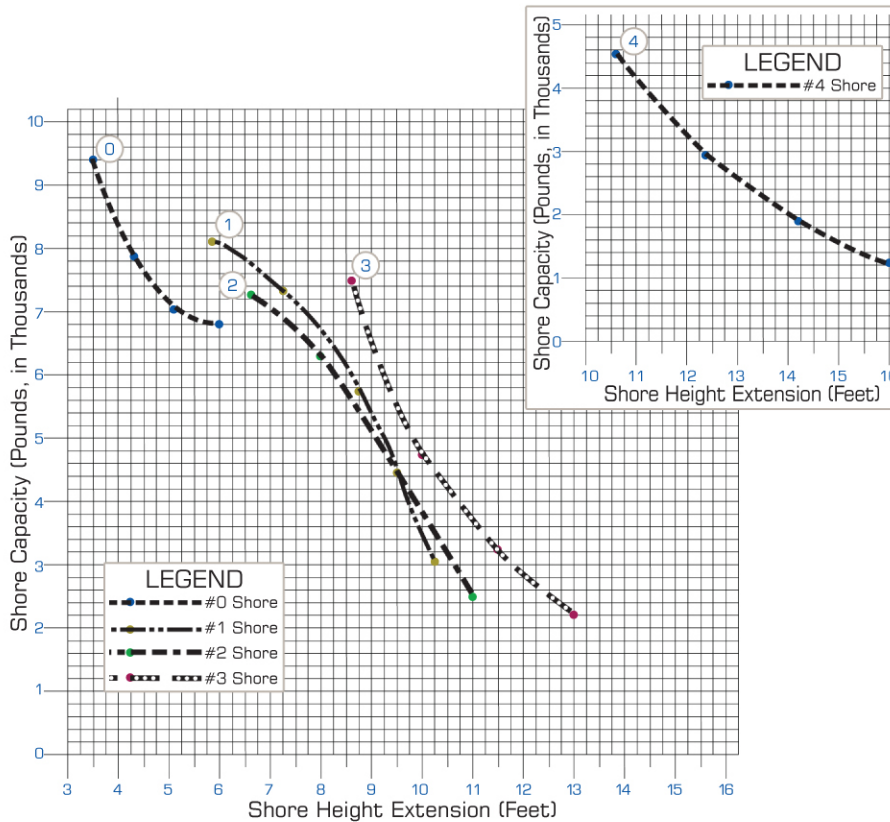

SKYHIGH HEAVY DUTY POST SHORE LOADING CHART


- Safe working load (pounds) for UNBRACED post shores loaded concentrically.
- When supporting timber / aluminum / steel bearers, load may be limited by stress in these materials.
- This table applies only to Skyhigh Heavy Duty Shores.
- Factor of safety for the above table = 3 to 1.
- Contact Skyhigh's Engineering Department for further information.



SKYHIGH

Steel Post Shores

Efficient, Versatile, Any Configuration, Economical

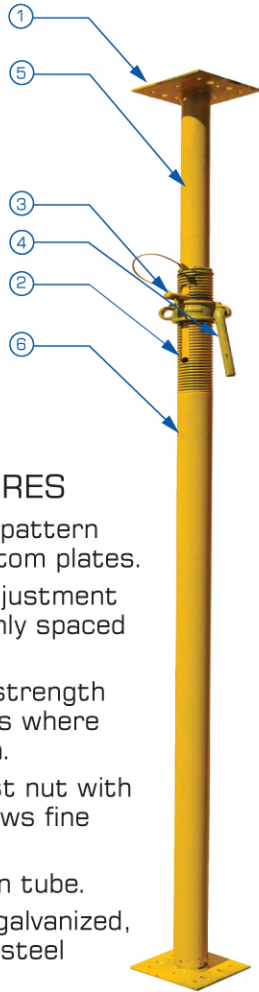

EN8 Pins and Galvanized Stranded Wires

Painted one coat.

Size	Closed		Open		Weight
No. 0	1.041m	3'5"	1.829m	6'0"	29lbs
No. 1	1.753m	5'9"	3.124m	10'3"	44lbs
No. 2	1.981m	6'6"	3.352m	11'0"	50lbs
No. 3	2.590m	8'6"	3.952m	13'0"	54lbs
No. 4	3.200m	10'6"	4.876m	16'0"	64lbs

VERTICAL SHORES

1. Universal bolt pattern in top and bottom plates.
2. Fast height adjustment by pinning evenly spaced holes.
3. Captive, high-strength pins are always where you need them.
4. Galvanized cast nut with handle rod allows fine adjustment.
5. Inner extension tube.
6. Heavy gauge, galvanized, high strength steel outer tube.



DIVISION OF SKYWAY CANADA LIMITED

310 - 103rd Street E., Saskatoon, SK,
Canada S7N 1Z1
Tel.: 306.374.6548 • Fax.: 306.374.6186
Toll Free: 1.866.866.3700

4752- 76 Avenue, Edmonton, AB,
Canada T6B 0A5
Tel.: 780.702.0607 • Fax.: 780.702.0609
Toll Free: 1.866.866.3700

270 Agri Park Rd, Unit 3, Winnipeg, MB,
Canada R0G 1N0
Tel.: 204.942.1552 • Fax.: 204.942.2289
Toll Free: 1.866.866.3700

www.skywaycanada.ca

*All specifications and load information should be confirmed with Skyhigh prior to use.